
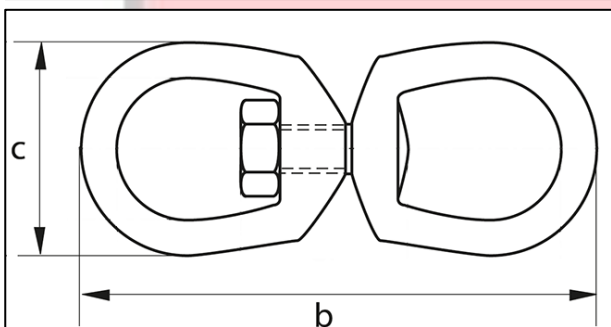


FICHA TÉCNICA DE PRODUCTO DESTORCEDOR OJO/OJO G-402

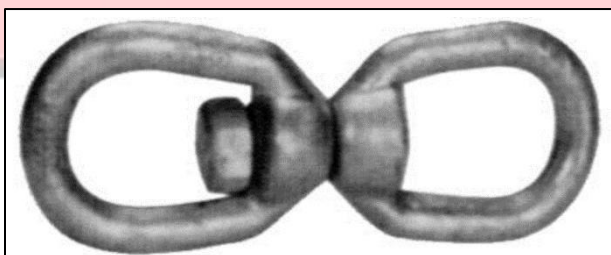

- FABRICADOS DE ACERO FORJADO.
- MATERIAL TEMPLADOS Y REVENIDO.
- TRATAMIENTO DE GALVANIZADO EN CALIENTE.
- FACTOR DE SEGURIDAD 5:1
- RECOMENDADOS PARA CARGAS EN LINEA

CÓDIGO	MEDIDA (pulgadas)	DIMENSIONES (pulgadas)		W.L.L. (lbs)	PESO (lbs)
		Largo Exterior (b)	Ancho Exterior (c)		
3977	1/4	2.94	1.25	850	0.21
3978	5/16	3.56	1.63	1250	0.39
3979	3/8	4.31	2.00	2500	0.75
3980	1/2	5.44	2.50	3600	1.43
3981	5/8	6.56	3.00	5200	2.50
3982	3/4	7.19	3.50	7200	4.13
3983	7/8	8.38	4.00	10000	6.25
3985	1	11.65	4.50	12500	9.00
3425	1.1/4	13.62	5.60	18000	16.37
3424	1.1/2	20.15	7.00	45200	49.06

W.L.L. (Working Load Limit/Límite de Carga de Trabajo): Es la carga de trabajo segura para uso regular en condiciones normales.